

# HU-440 / 600 SA

## HYDRAULIC BANDSAW MACHINE



### DESCRIPTION

Band sawing machine made with the highest strength and reliability. Exact cutting by means of hard metal guides, right and left cutting until 60°, digital display, refrigeration by air-oil atomiser.

### OPTIONAL EQUIPMENT

- Hydraulic/manual vertical clamp.
- Roller-tracking for heavy loaded material.
- Manual, digital and self-positioning roller-tracking with measurement system.
- Cutting laser light

### CHARACTERISTICS

- Cooling unit by micro-pulverization
- Electronic speed 26/86
- Tension control and ribbon breakage
- Adjustable cutting pressure
- Hydraulic of 0.5 kw

### CONTROL PANEL



## SPECIFICATIONS

Belt dimensions		5200x34x1,1 mm.
Engine		3 kw
Cutting speed		VARIADOR 26/86 m/min.
Working height		760 mm.
Weight		1100 kg.
Dimensions		2700x900x1420 mm.
Acoustic		70 db
Cutting capacity	○	90 <sup>0</sup> 445 mm.
Cutting capacity	□	90 <sup>0</sup> 600x445 mm.
Cutting capacity	□	90 <sup>0</sup> 445 mm.
Cutting capacity	○ RIGHT	+ 45 <sup>0</sup> 430 mm.
Cutting capacity	□ RIGHT	+ 45 <sup>0</sup> 440x360 mm.
Cutting capacity	□ RIGHT	+ 45 <sup>0</sup> 400 mm.
Cutting capacity	○ RIGHT	+ 60 <sup>0</sup> 310 mm.
Cutting capacity	□ RIGHT	+ 60 <sup>0</sup> 310x420 mm.
Cutting capacity	□ RIGHT	+ 60 <sup>0</sup> 310 mm.
Cutting capacity	○ LEFT	- 45 <sup>0</sup> 210 mm.
Cutting capacity	□ LEFT	- 45 <sup>0</sup> 330x170 mm.
Cutting capacity	□ LEFT	- 45 <sup>0</sup> 170 mm.
Cutting capacity	○ LEFT	- 60 <sup>0</sup> 210 mm.
Cutting capacity	□ LEFT	- 60 <sup>0</sup> 330-170 mm.
Cutting capacity	□ LEFT	- 60 <sup>0</sup> 170 mm.

## OPTIONS

### ROLLER-TRACKING




### STOP WITH ROAD ROLLER MANUAL



### VERTICAL CLAMPING OPTION



### CUTTING LINE OPTION

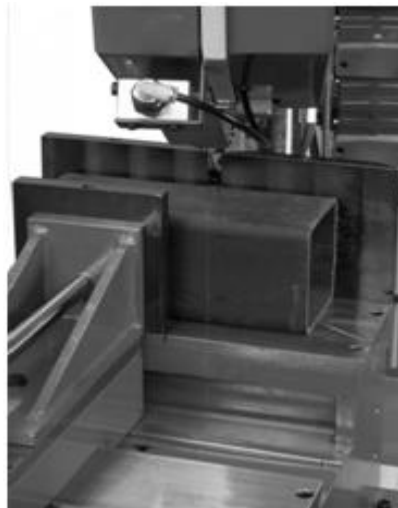

### LUBETOOLS INCLUDED



### CONTROL PANEL DESCRIPTION

